

# 21.5" LCD Panel PC/TV

## Give everything you want within a monitor and more

Multimedia center LCD Panel PC / TV has every thing you need...,  
TV Tuner , Touch Screen, Webcam 1.3M Pixel, Multimedia Card Reader, Wireless LAN, Bluetooth and saving space.

### APPLICATIONS

- Kiosk
- Military
- Banking
- Computer Class
- Thin Client
- Government Building
- Hospital
- Factory Floor
- POS

### Wall Mountable

VESA mount compliant mounting holes  
for healthcare, other industries for efficiency  
and space saving in the workplace.

*All-In-One  
for Better life*



**RS-5622NL**



Wireless LAN



TV Tuner Card

### Support

- Intel® Core™2 Quad/ Core™ 2 Duo / Pentium® / Celeron
- DDR II from 512MB to 4GB
- SATA II HDD up to 1TB or above
- Slim DVD Multi RW

### Optional




**RISE**

# 21.5" LCD Panel PC/TV

Give everything you want within a monitor and more

**RS-5622NL**

*All-In-One  
for Better life*

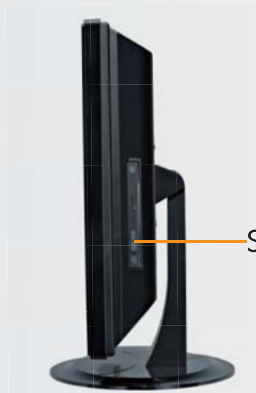

Slim DVD Multi RW



Card Reader

USB x1

AUDIO x3

USB x3

## Specifications

CPU	* Intel® Core™2 Quad / Core™2 Duo / Pentium® LGA775 800/1066/1333 FSB
Chipset	* North Bridge Intel® Q35 Express Chipset
Memory	* South Bridge Intel® ICH9 * 2x DDR II DIMM memory slots (supports up to 4GB memory) * Supports 1.8V DDR II DIMM * Supports dual channel DDRII 800/667 DIMM
HDD	* 3.5" size SATA2 (Up to 1TB or above)
Optical Device	* Slim DVD Multi RW
Display Resolution	* 21.5" TFT LCD (WXGA 1920x1080)
Expansion Slots	* 2x mini PCI slot (internal slot)
Audio	* Built-in 2x speakers (3W) * Intel® ICH9 integrated with Realtek ALC888 HD Audio
LAN	* Marvell 88E8053 controller supporting 10/100/1000 BASE-T Ethernet
USB Port	* Max 10x USB 2.0 ports (4x internal usb)
VGA Port	* Intel® Q35 built in experience superior graphics with Intel® GMA3100, up to 384MB shared with system memory
Multi-Media Card Reader	* SD / MS / MMC
Back Panel I/O Ports	1x Power Connector ; 1x PS/2 Keyboard ; 1x PS/2 Mouse ; 1x RJ45 ; 2x USB 2.0 ; 1x Serial ; 1x VGA ; 1x RCA (TV Cable)
Side Panel I/O Ports	4x USB 2.0 ; 3x Audio (Line In / Line Out / MIC ) ; Card Reader
Fan Speed Control	* The CPU fan speed can set by temperature of CPU
Watch Dog	Can be set by 500ms, 1, 2, 4 seconds period. RESET or NMI was generated when CPU did not periodically trigger the timer
Power Lost Recovery	System will auto power on when power failure
Power Adapter	Input : AC / 100~240V (50/60Hz) 2.5A Output : DC/20V, 9A 180W
Measurements	Wide : 53.8cm ; High : 45.2cm ; Thick : 8.4 cm
Weight	10.5Kg (with all spec) ; 8.8 Kg (without stand) ; 8Kg (barebone without stand)
WEBCAM	1.3M Pixels

## OPTIONAL:

Wireless LAN	32bit Mini-PCI card Interface, 802.11 a/b/g/n or 802.11 a/b/g
TV Tuner Card	Analog NTSC / PAL / SCEAM Mini-PCI card interface Digital DVB-T / ATSC
Touch screen	Internal RS-232 for Touch Screen Control Board 21.5" 5 wire resistive touch screen
Bluetooth	Blue Tooth V2.0 USB adapter



### RISECOM Corporation

9F, No. 306-3, TaTung Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan  
TEL: 886-2-26439992 (Rep) Fax: 886-2-26471298  
<http://www.rise.com.tw> E-mail: [sales@rise.com.tw](mailto:sales@rise.com.tw)